




Kenford DYG820A

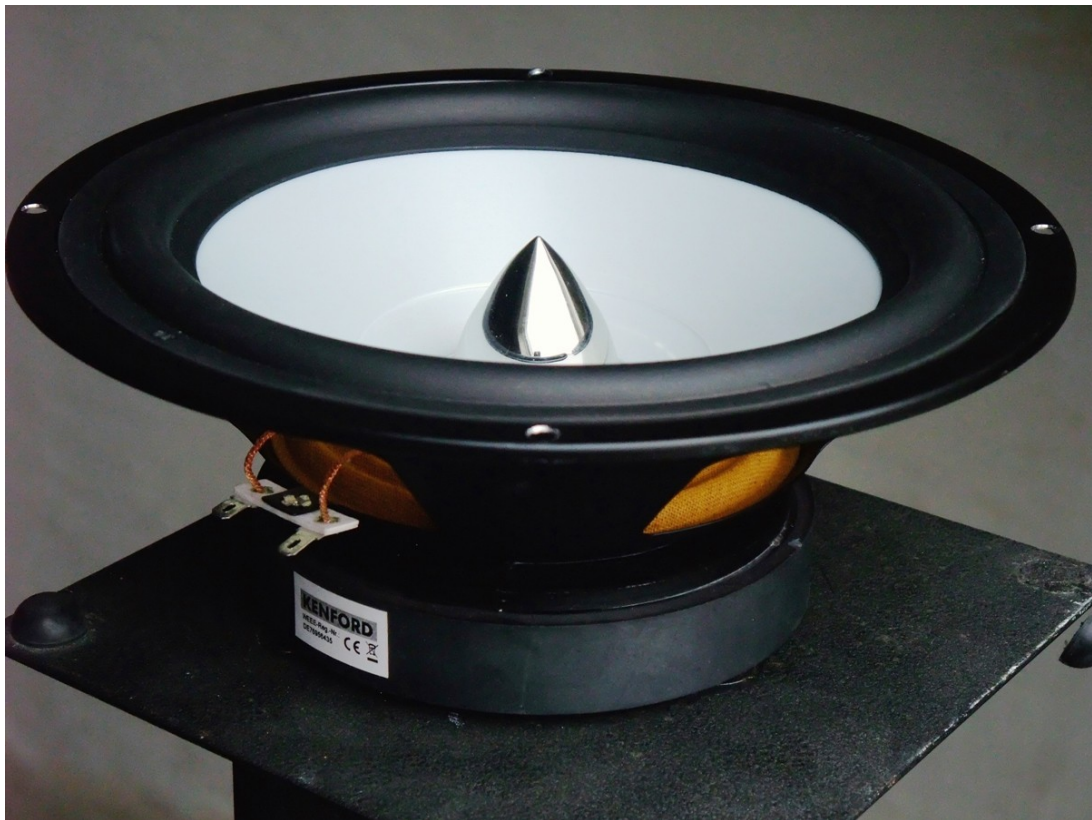

- Polymembran
- Phase Plug
- 40er Schwingspule

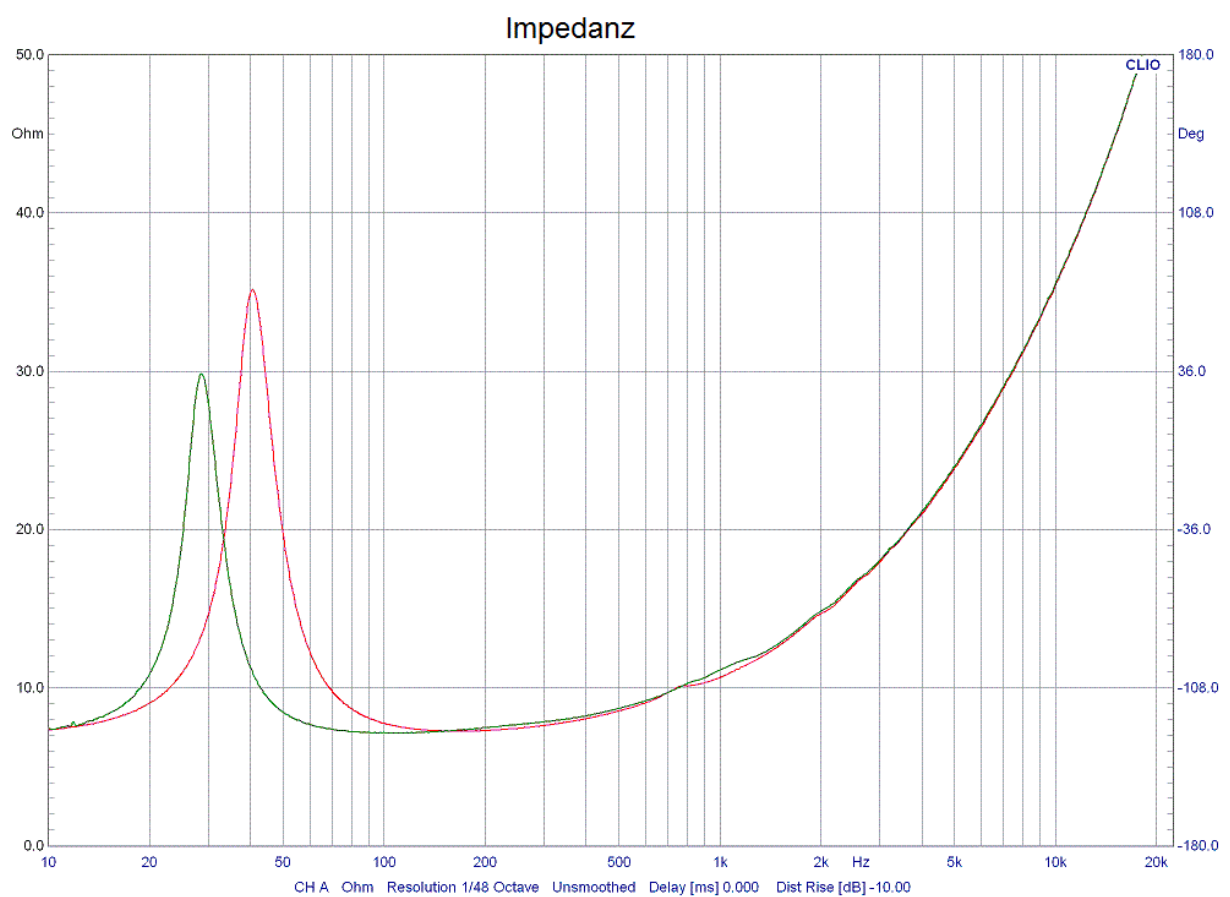


Frequenzgang

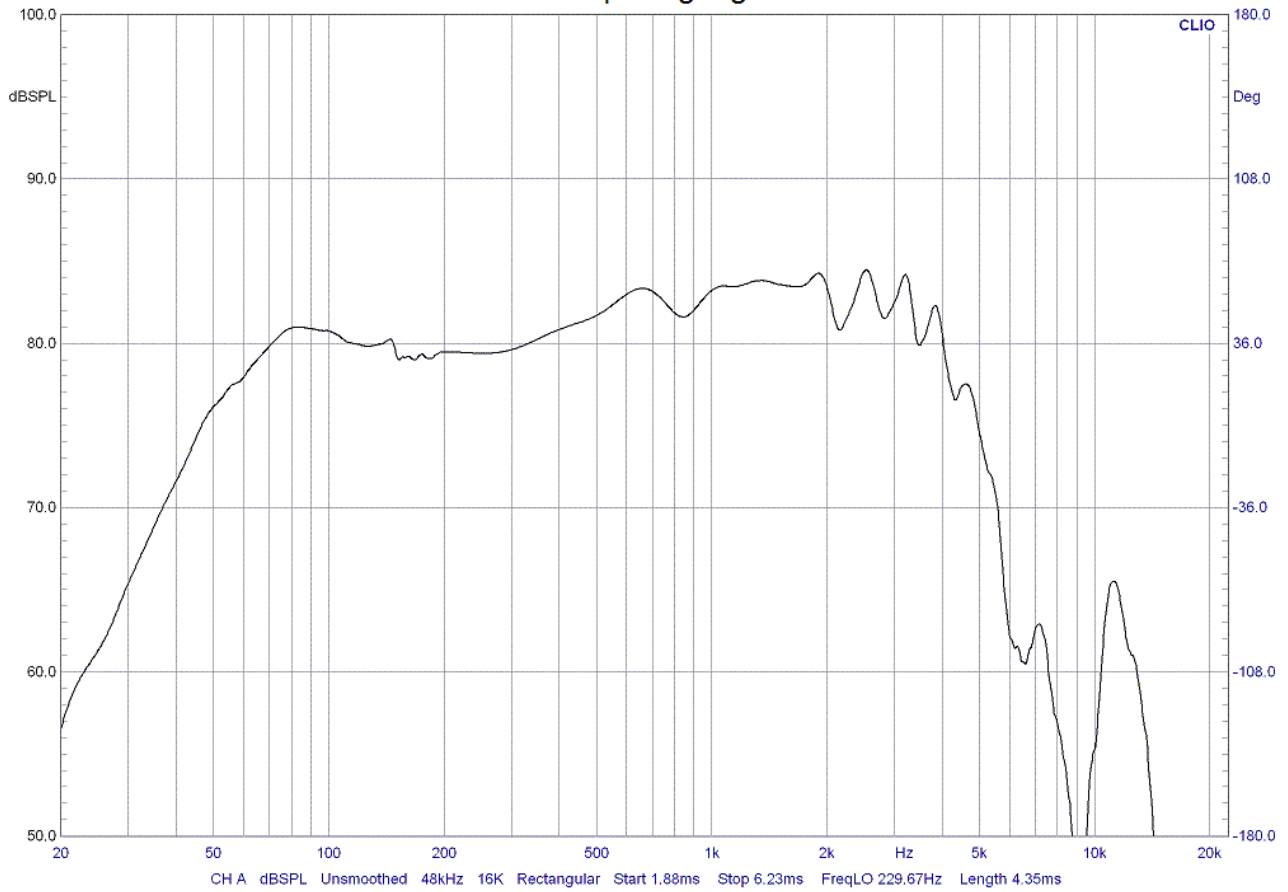


F_s	40.5708 Hz	V_{AS}	32.4280 L	R_E	6.7000 Ω
Q_{MS}	3.8460	Q_{ES}	0.9049	Q_{TS}	0.7325
$B \cdot l$	7.4707 T·m	dB SPL	85.8123	S_D	0.0211 m ²
C_{MS}	0.5204 mm/N	M_{MS}	29.5698 g	R_{MS}	1.9599 Ω_M
C_{AS}	2.32E-0007 m ⁵ /N	M_{AS}	66.27 kg/m ⁴	R_{AS}	4392 Ω_A
C_{MES}	529.8213 μ F	L_{CES}	29.0458 mH	R_{ES}	28.4768 Ω
R_{AT}	23060 Ω_A	R_{MT}	10.2898 Ω_M	M_{MD}	27.8320 g
Z_{MIN}	7.2300 Ω	Z_{MAX}	35.1768 Ω	Z_{AVG}	17.0516 Ω
η_0	0.2297 %	L_{1kHz}	0.8582 mH	L_{10kHz}	0.4406 mH


Ausschwingen

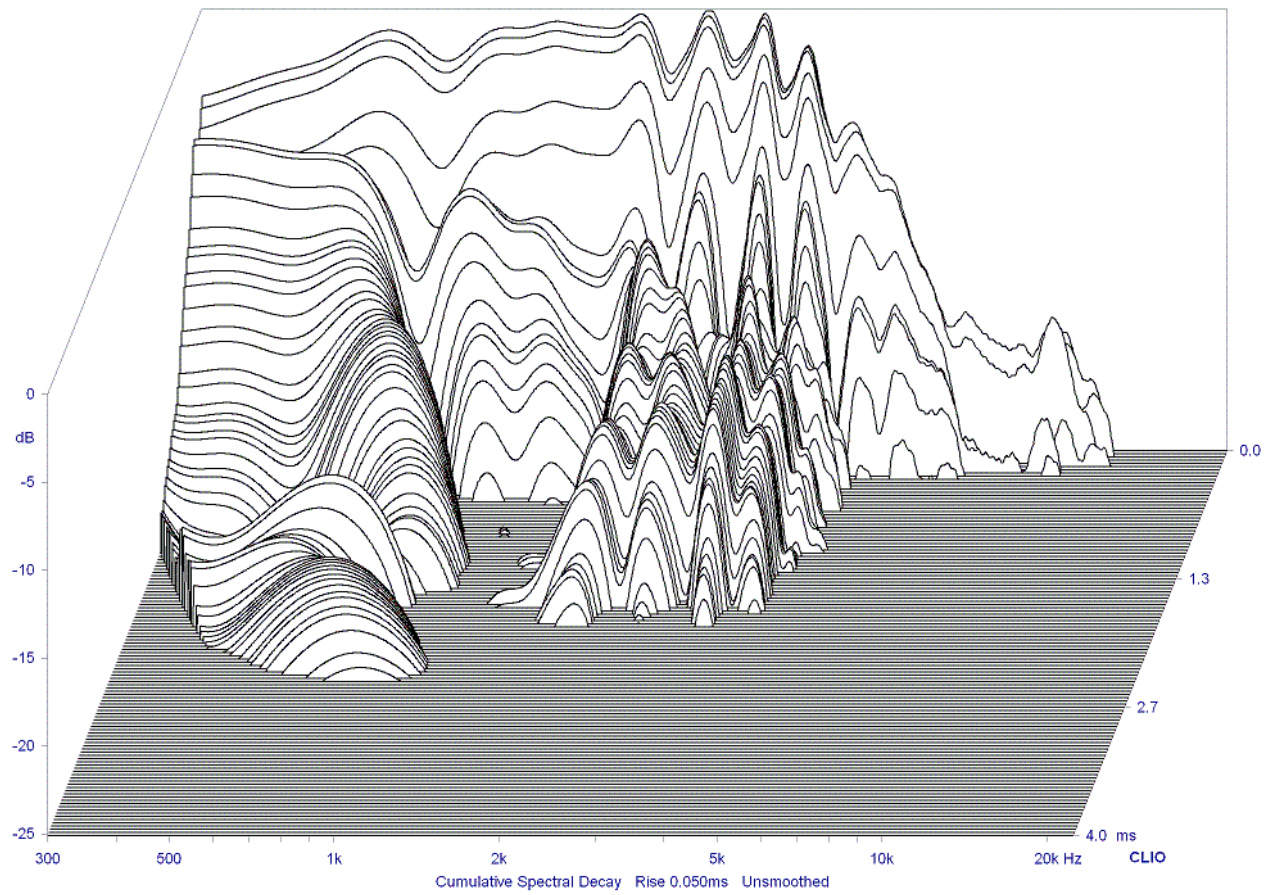


Klirr bei 85dB

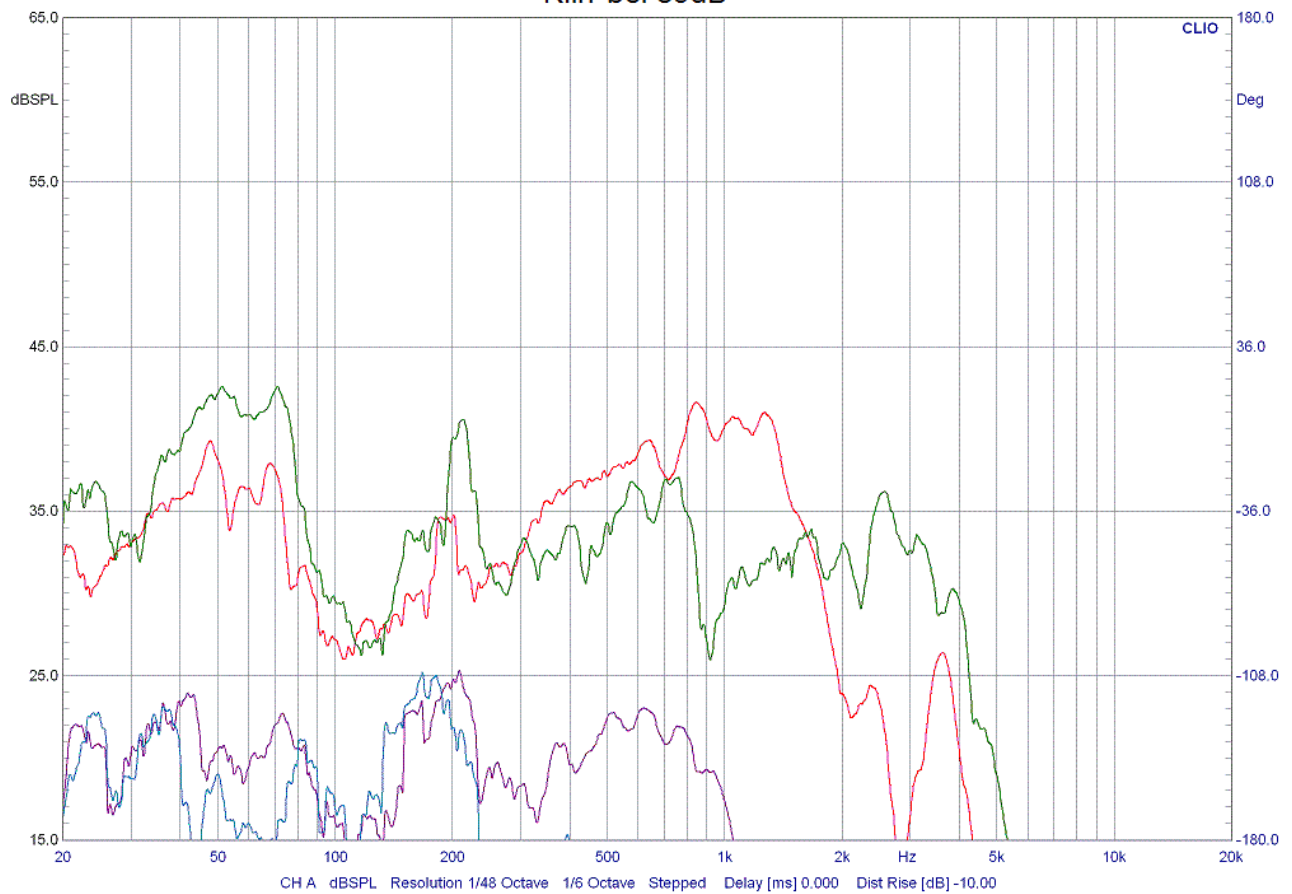

Klirr bei 95dB

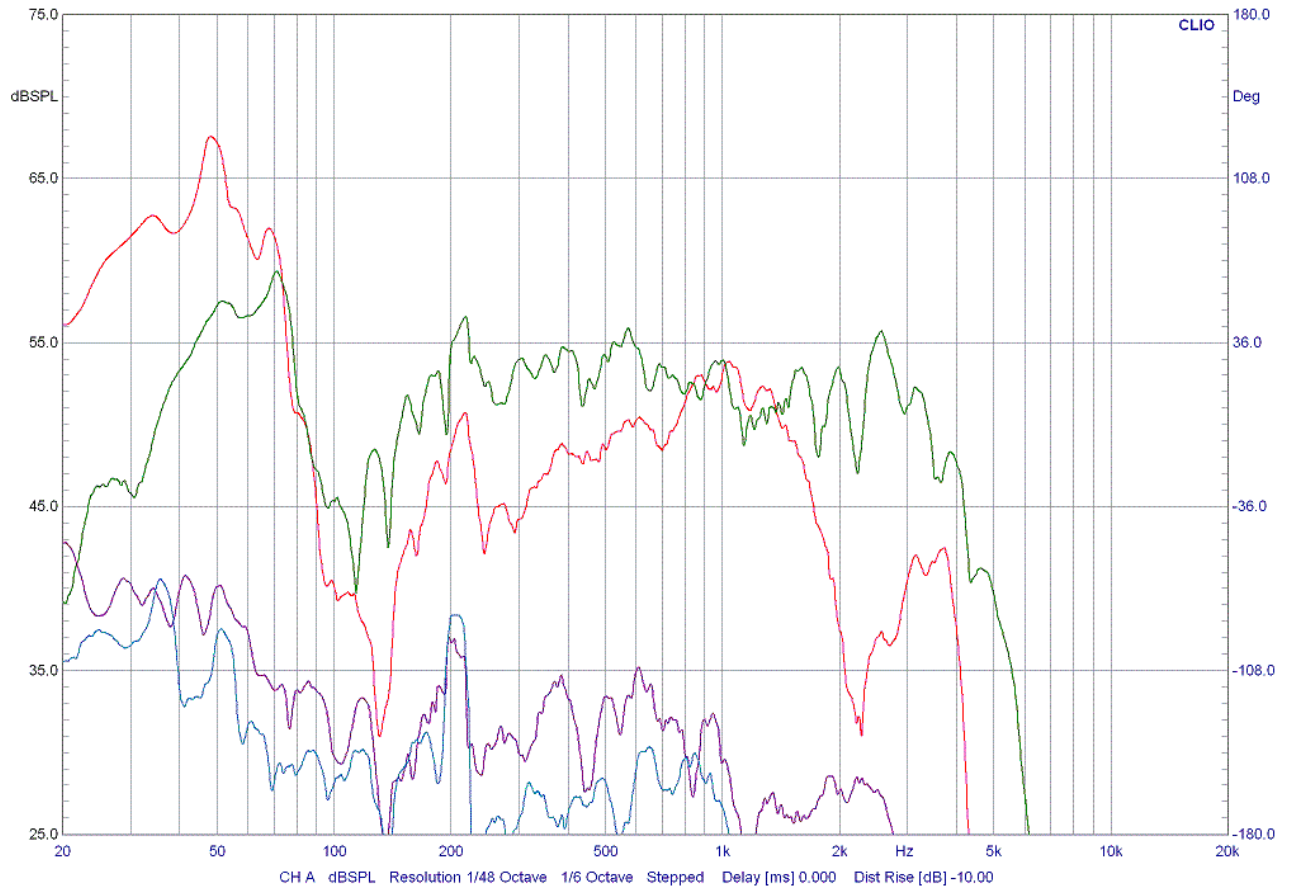

Multitone-IMD

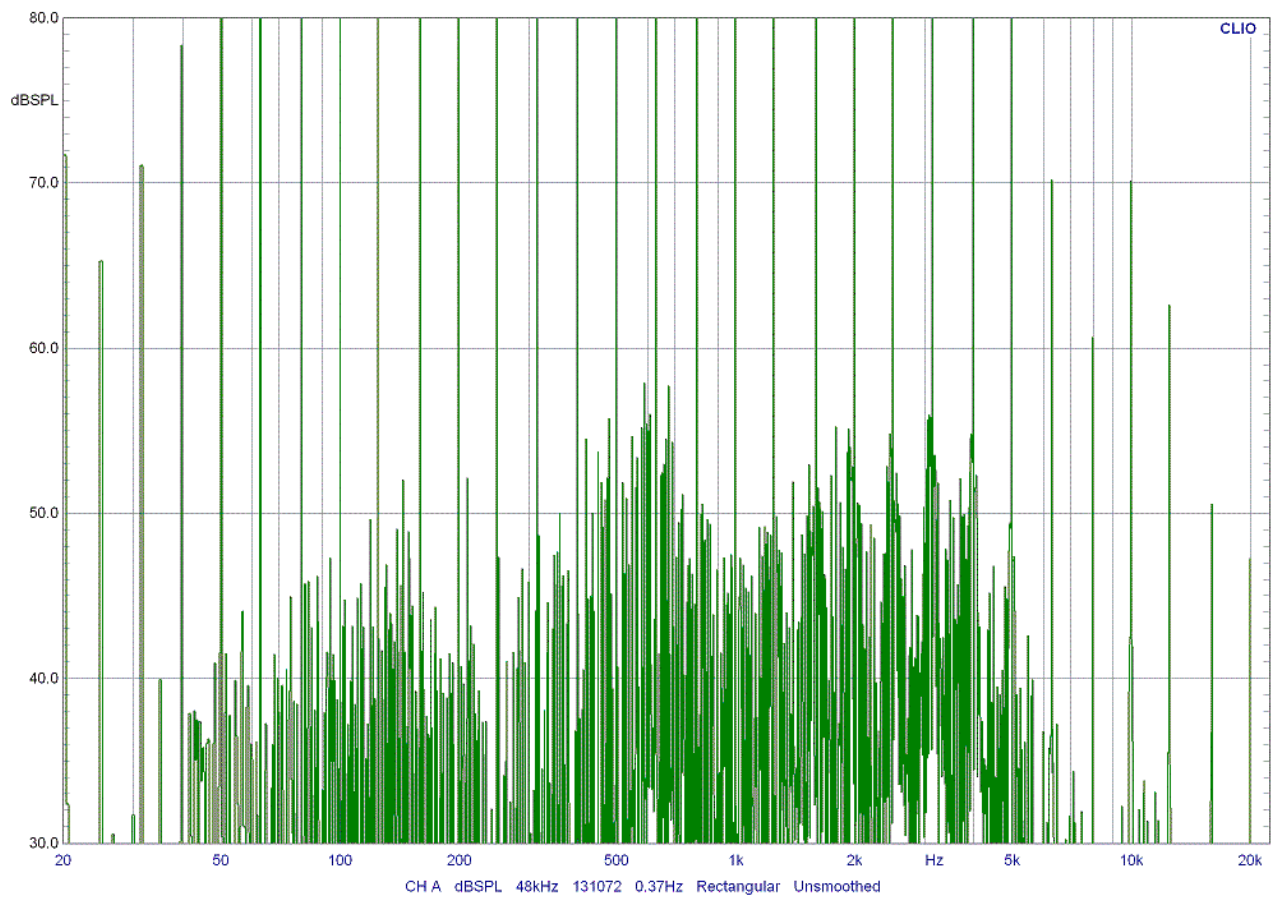

Zweitone-IMD

