



Kenford SBX 1620



- Kevlarmembran
- Polkernbohrung

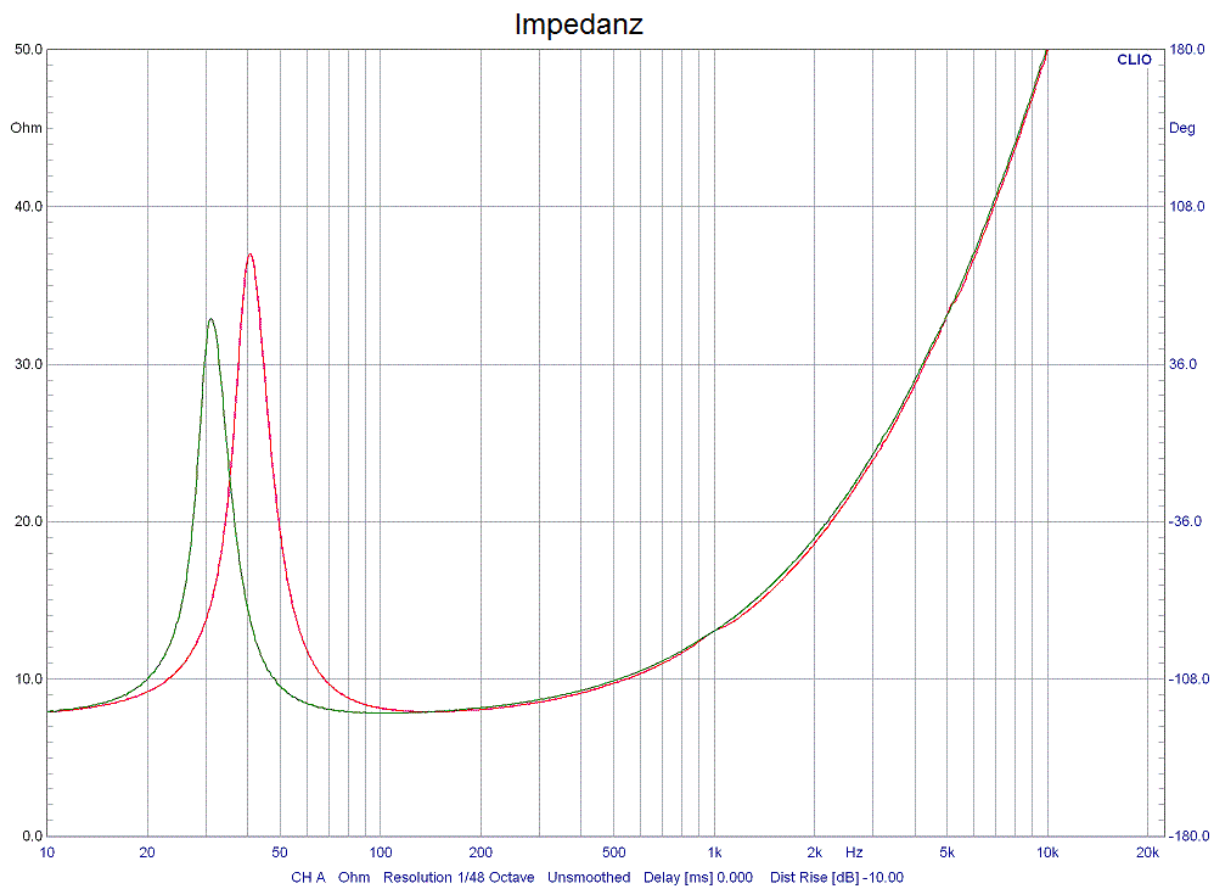


Frequenzgang

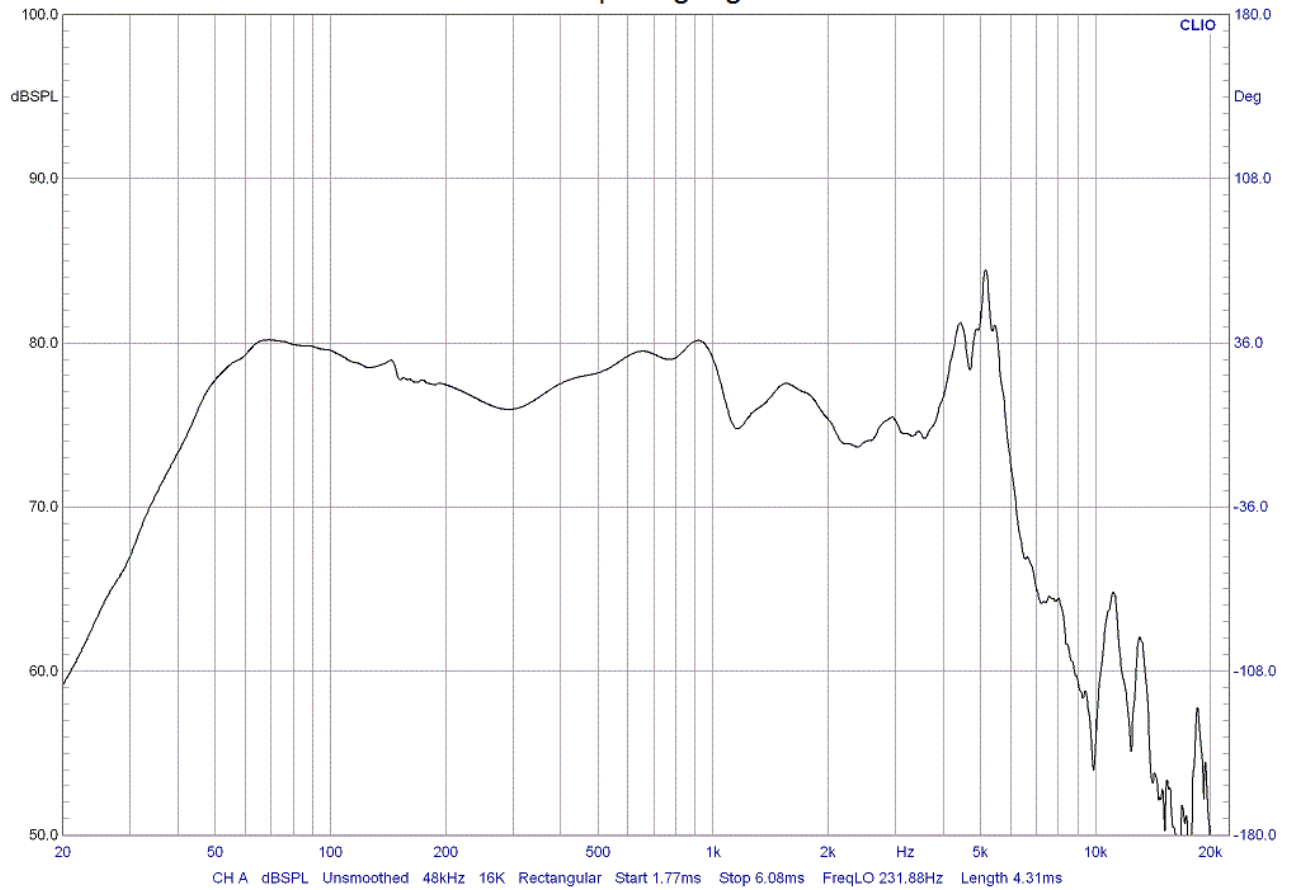


F_s	40.7238 Hz	V_{AS}	20.1808 L	R_E	7.3000 Ω
Q_{MS}	4.3518	Q_{ES}	1.0682	Q_{TS}	0.8577
$B \cdot l$	5.8828 T·m	dB SPL	83.0809	S_D	0.0137 m ²
C_{MS}	0.7717 mm/N	M_{MS}	19.7916 g	R_{MS}	1.1637 Ω_M
C_{AS}	1.45E-0007 m ⁵ /N	M_{AS}	105.68 kg/m ⁴	R_{AS}	6214 Ω_A
C_{MES}	571.8911 μ F	L_{CES}	26.7073 mH	R_{ES}	29.7389 Ω
R_{AT}	31528 Ω_A	R_{MT}	5.9044 Ω_M	M_{MD}	18.8855 g
Z_{MIN}	7.8918 Ω	Z_{MAX}	37.0389 Ω	Z_{AVG}	21.2978 Ω
η_0	0.1225 %	L_{1kHz}	1.2425 mH	L_{10kHz}	0.6219 mH


Ausschwingen

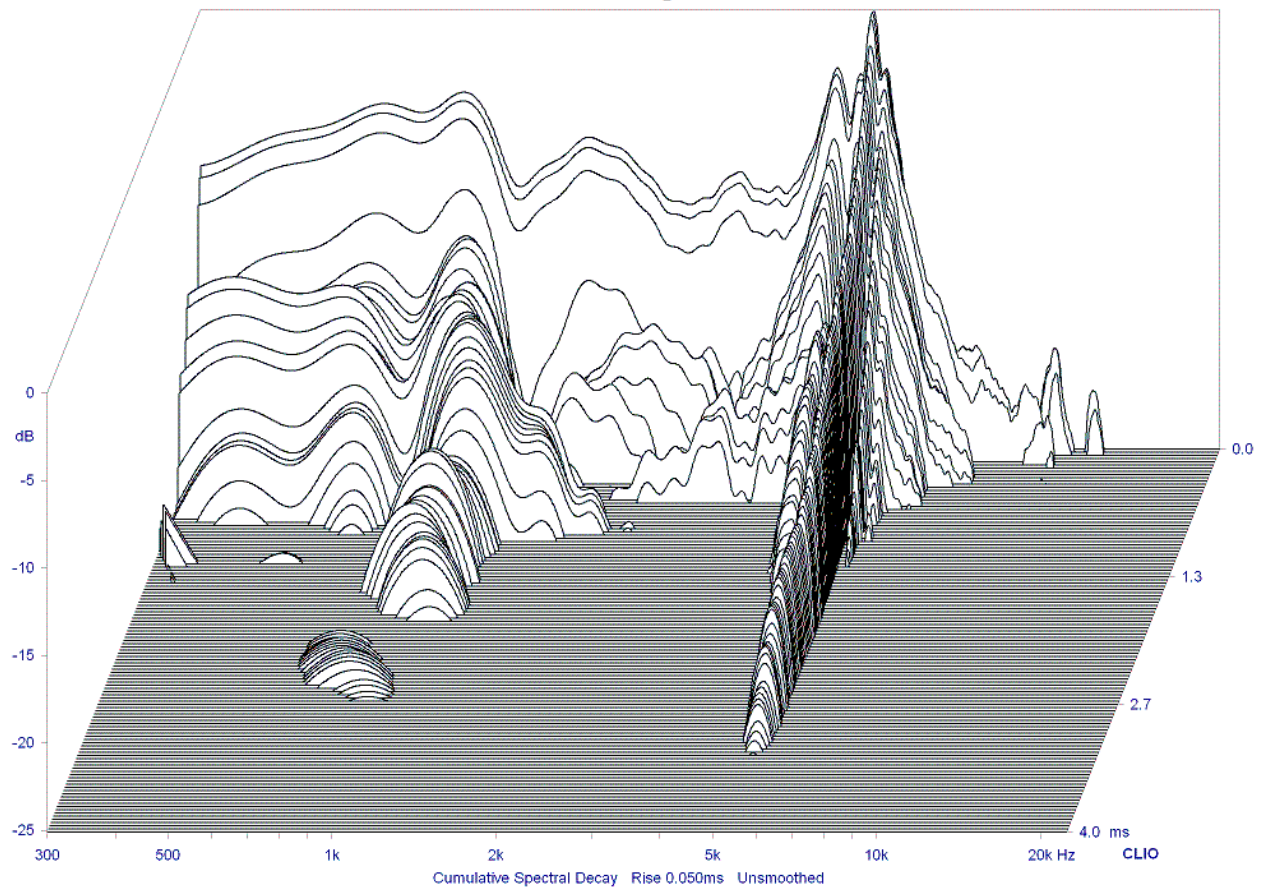


Klirr bei 85dB

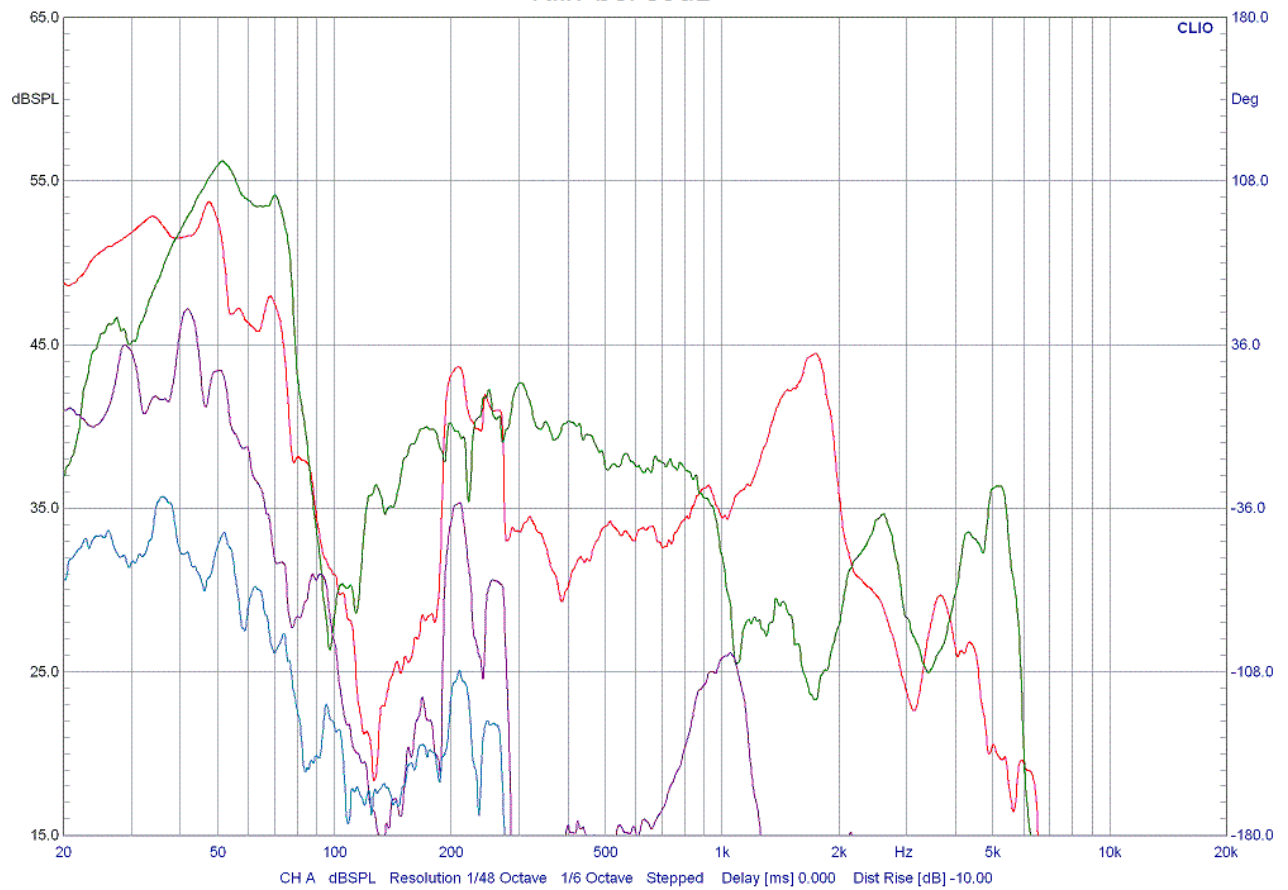

Klirr bei 95dB

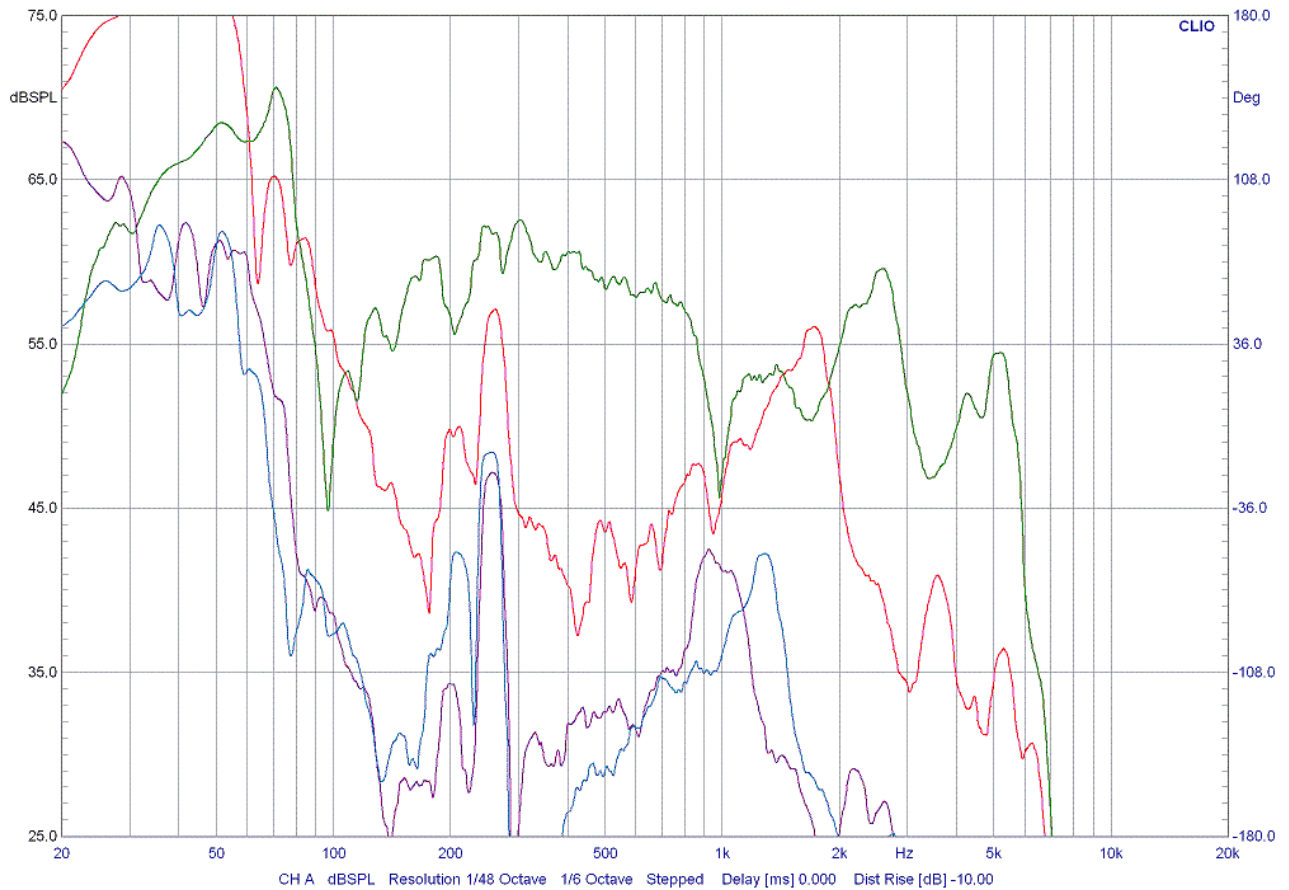

Multitone-IMD

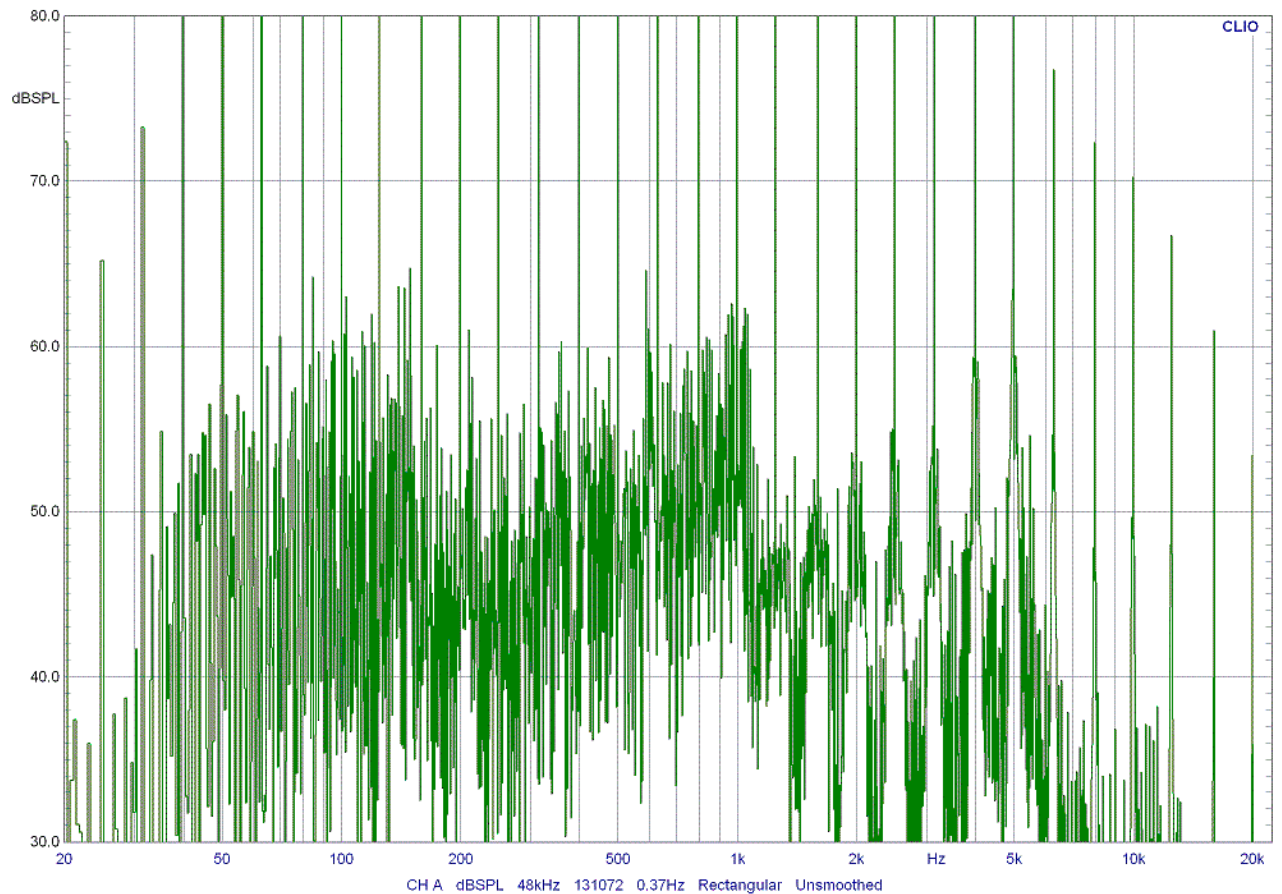

Zweitone-IMD

