



Tiefmitteltöner RTO PWR-170



-Polypropylen-Membran
-gute Hubfähigkeit

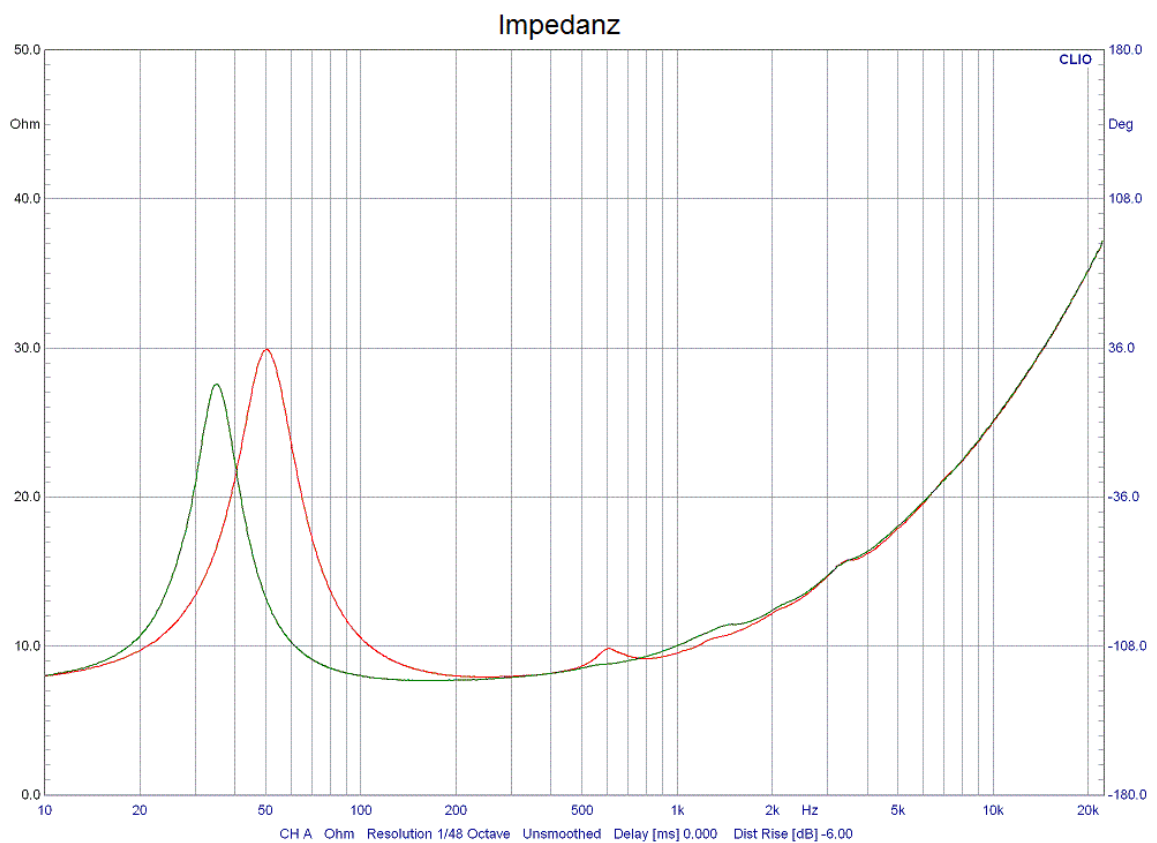


Frequenzgang

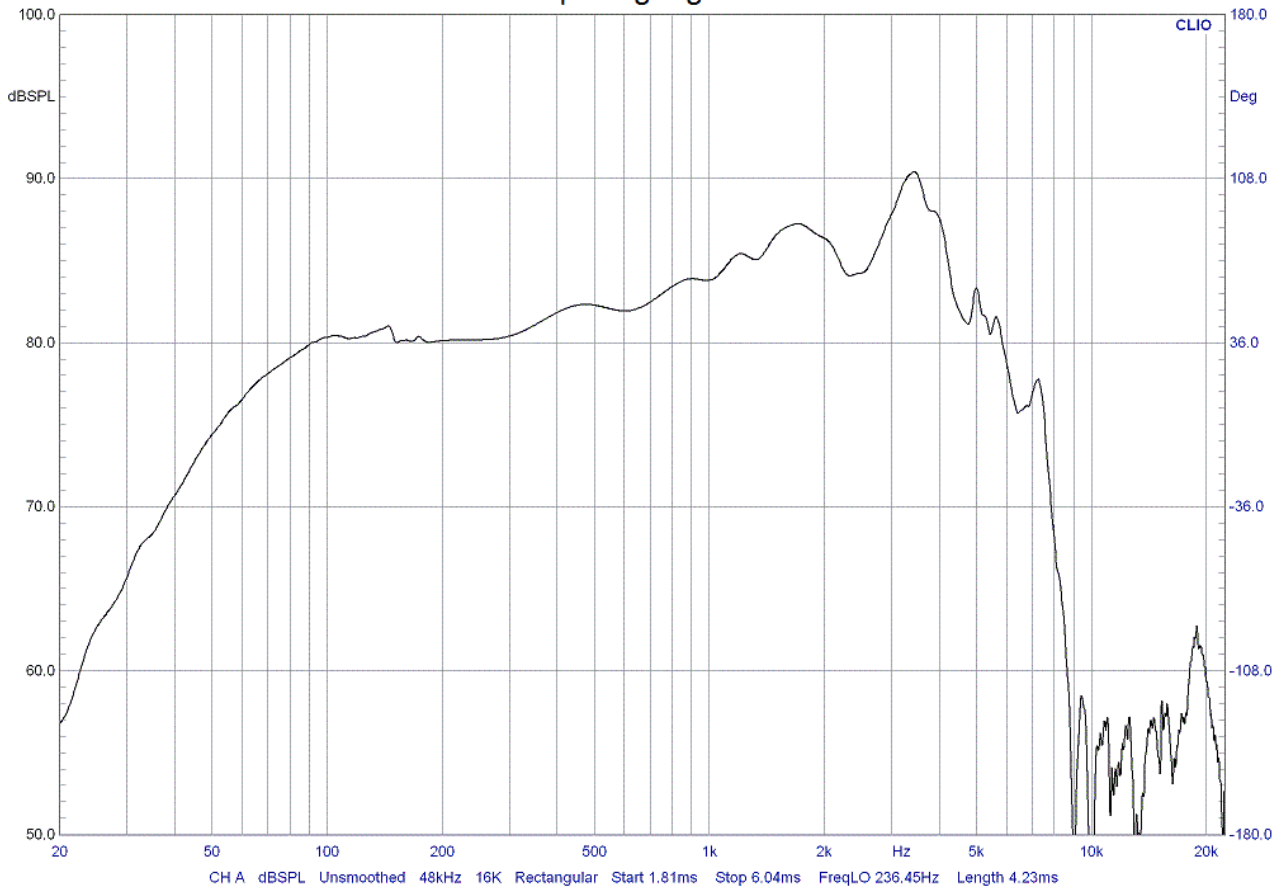


F_S	50.4711 Hz	V_{AS}	17.5578 L	R_E	7.2000 Ω
Q_{MS}	2.3467	Q_{ES}	0.7440	Q_{TS}	0.5649
$B \cdot l$	6.3391 T·m	dB SPL	86.8427	S_D	0.0129 m ²
C_{MS}	0.7594 mm/N	M_{MS}	13.0949 g	R_{MS}	1.7695 Ω_M
C_{AS}	1.26E-0007 m ⁵ /N	M_{AS}	79.08 kg/m ⁴	R_{AS}	10687 Ω_A
C_{MES}	325.8716 μ F	L_{CES}	30.5147 mH	R_{ES}	22.7088 Ω
R_{AT}	44392 Ω_A	R_{MT}	7.3507 Ω_M	M_{MD}	12.2687 g
Z_{MIN}	7.8969 Ω	Z_{MAX}	29.9088 Ω	Z_{AVG}	14.8276 Ω
η_0	0.2913 %	L_{1kHz}	0.5182 mH	L_{10kHz}	0.2747 mH


Ausschwingen

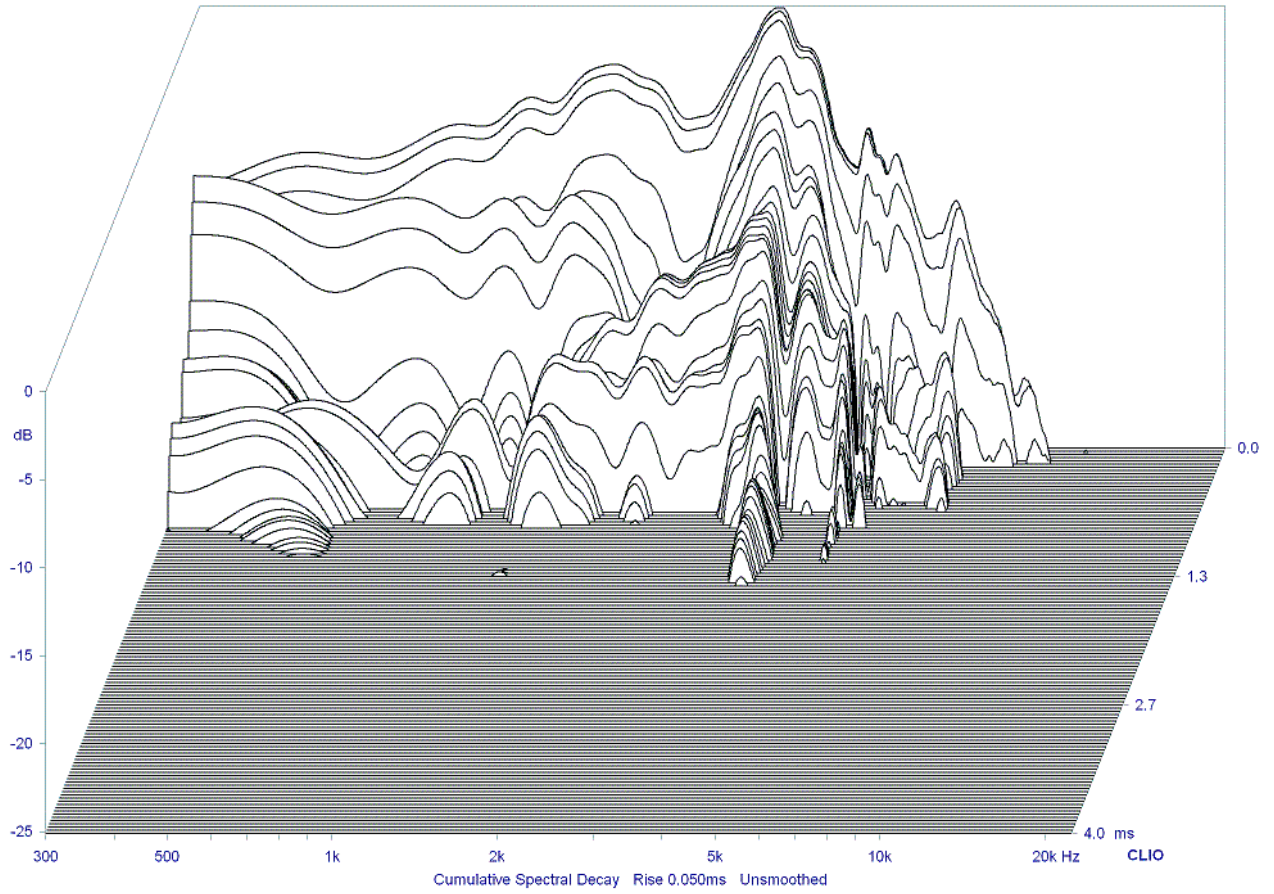


Klirr bei 85dB

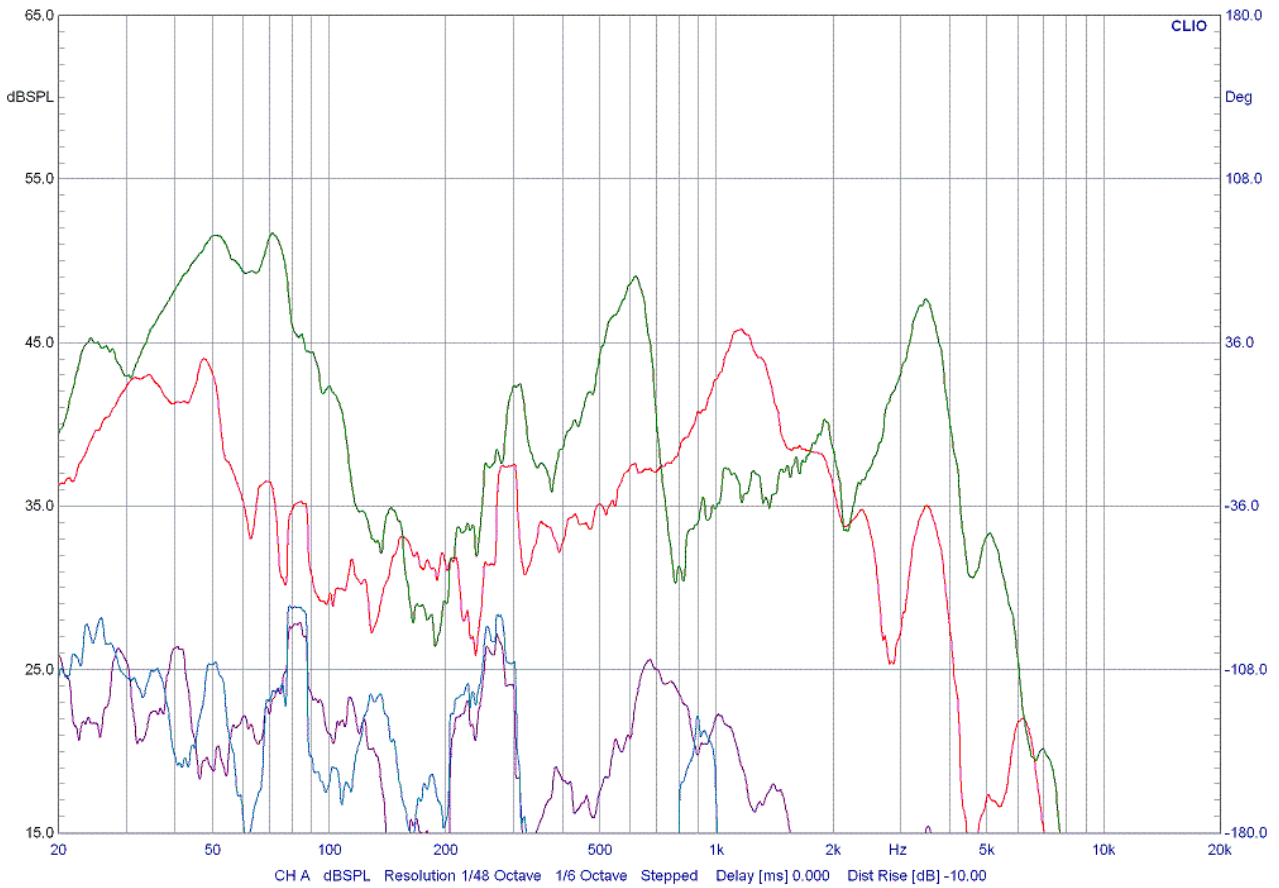

Klirr bei 95dB

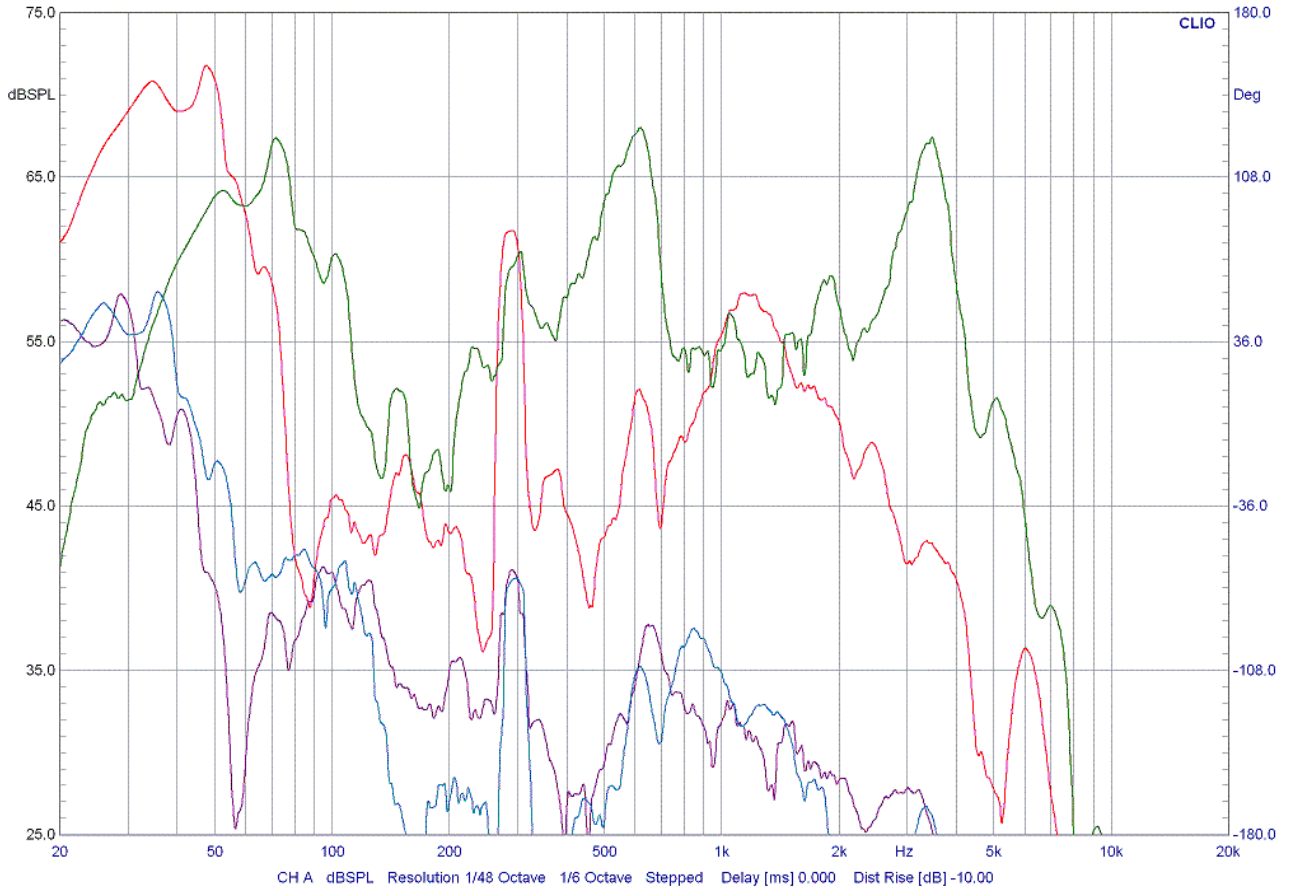

Multitone-IMD

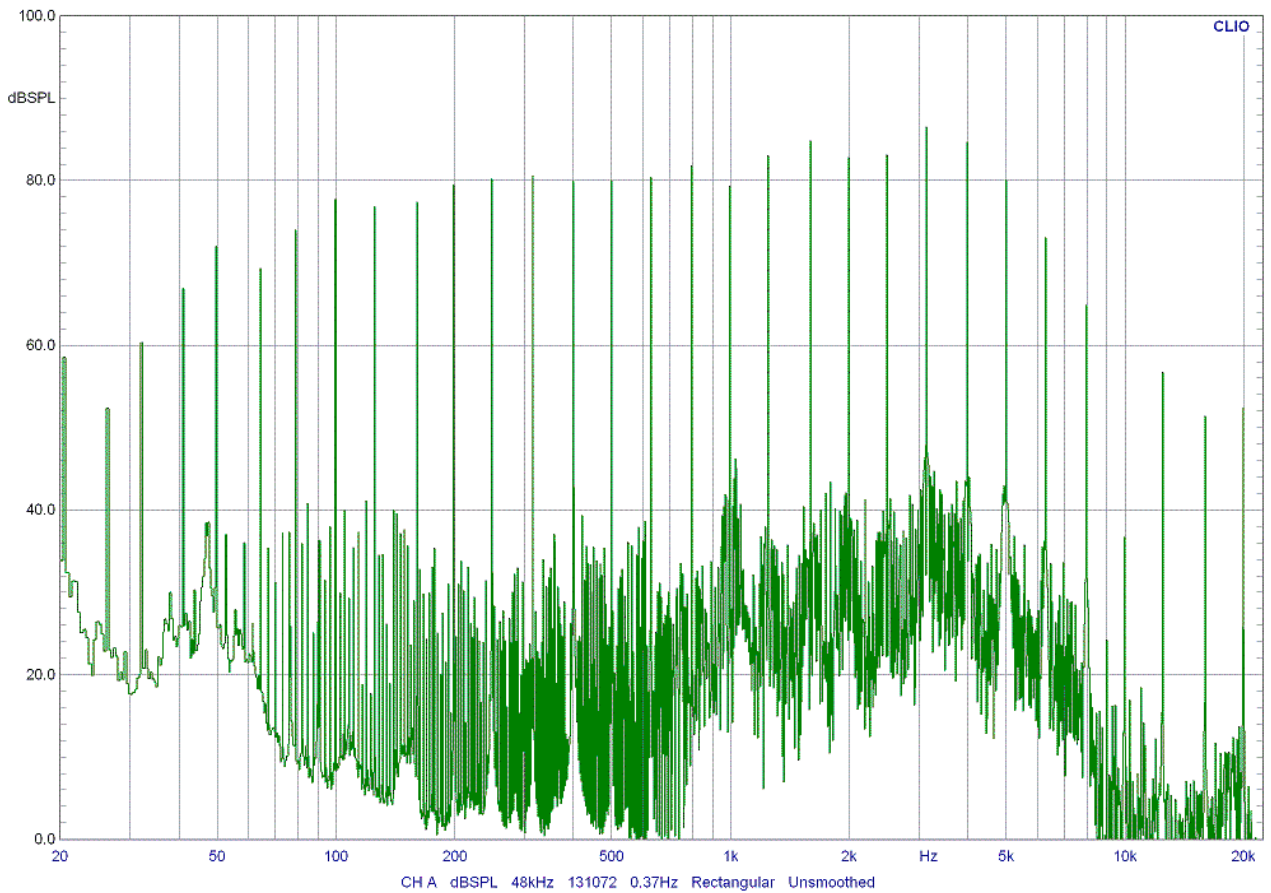

Zweitone-IMD

